



1 / 10

FIG. 1  
PRIOR ART




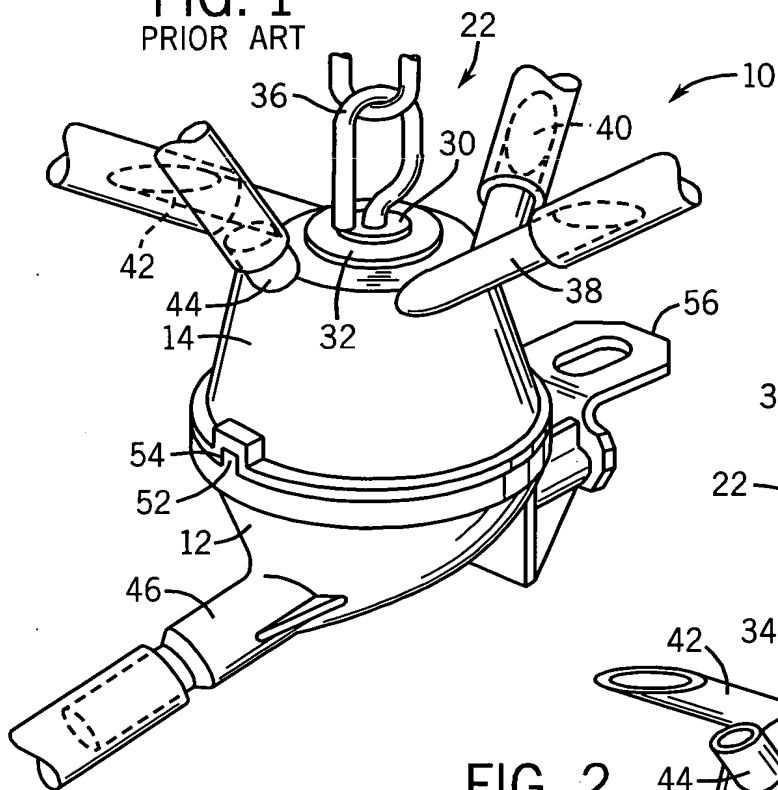


FIG. 2  
PRIOR ART

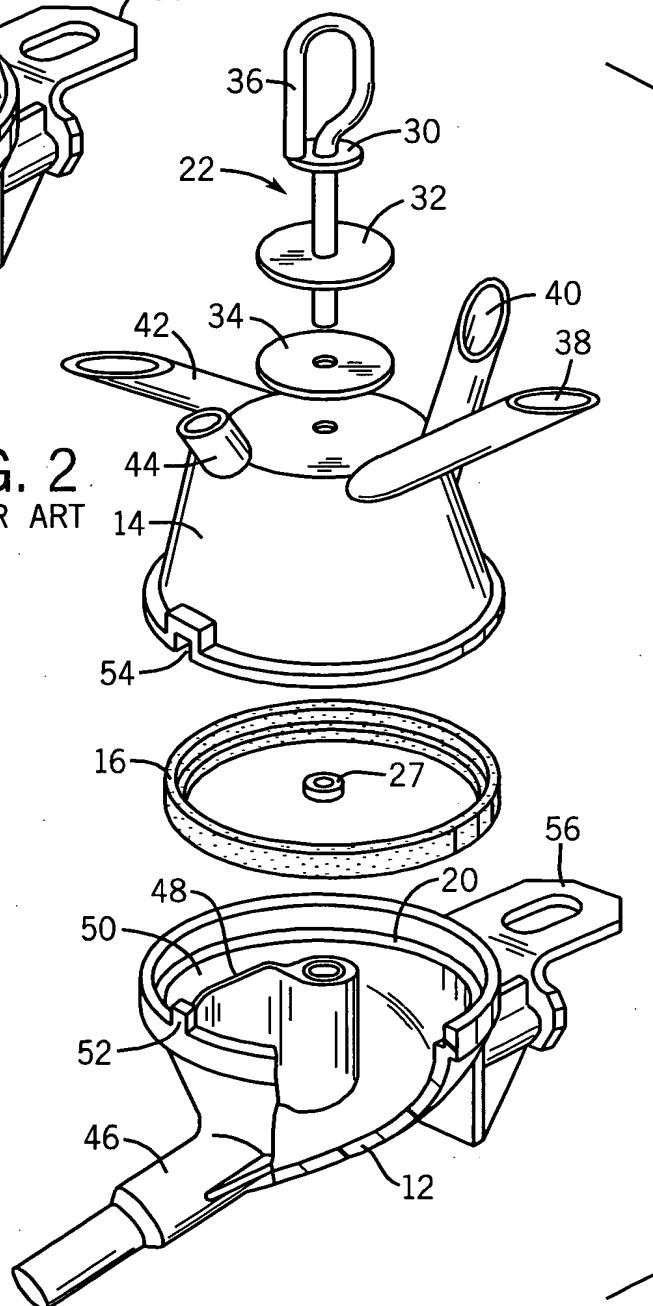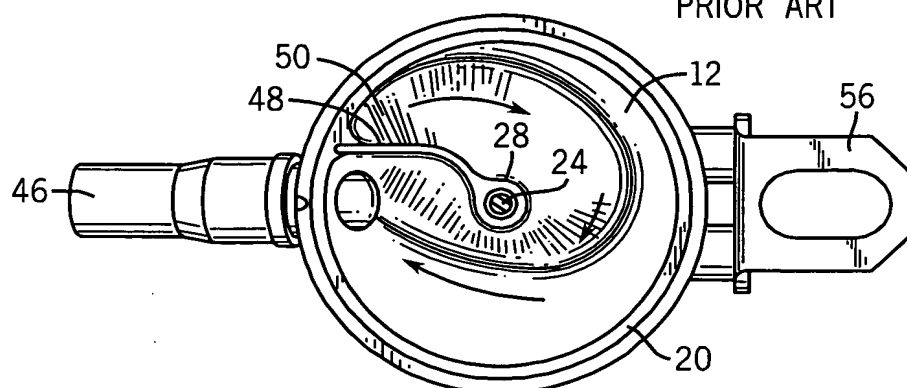

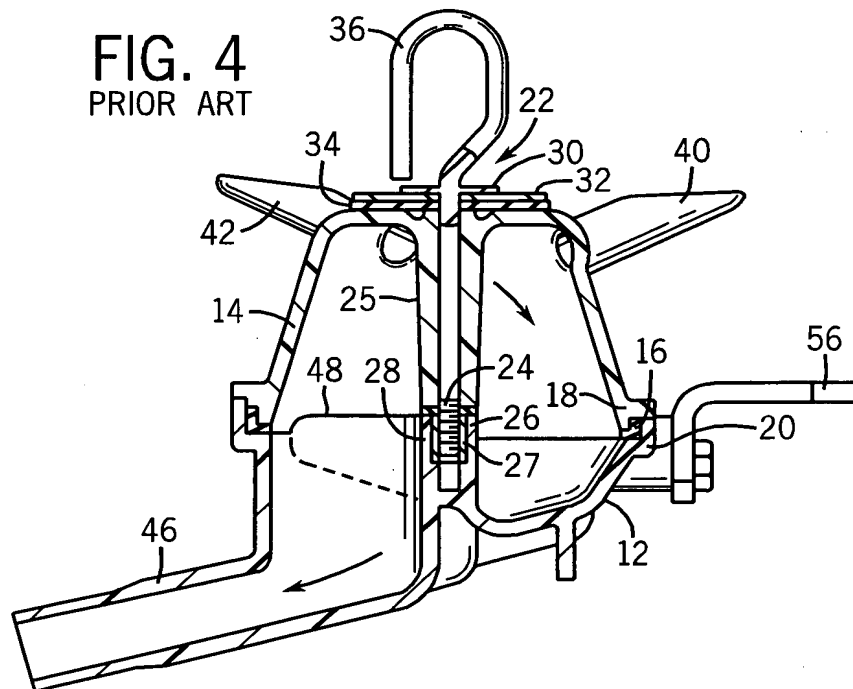

3 / 10

FIG. 6  
PRIOR ART

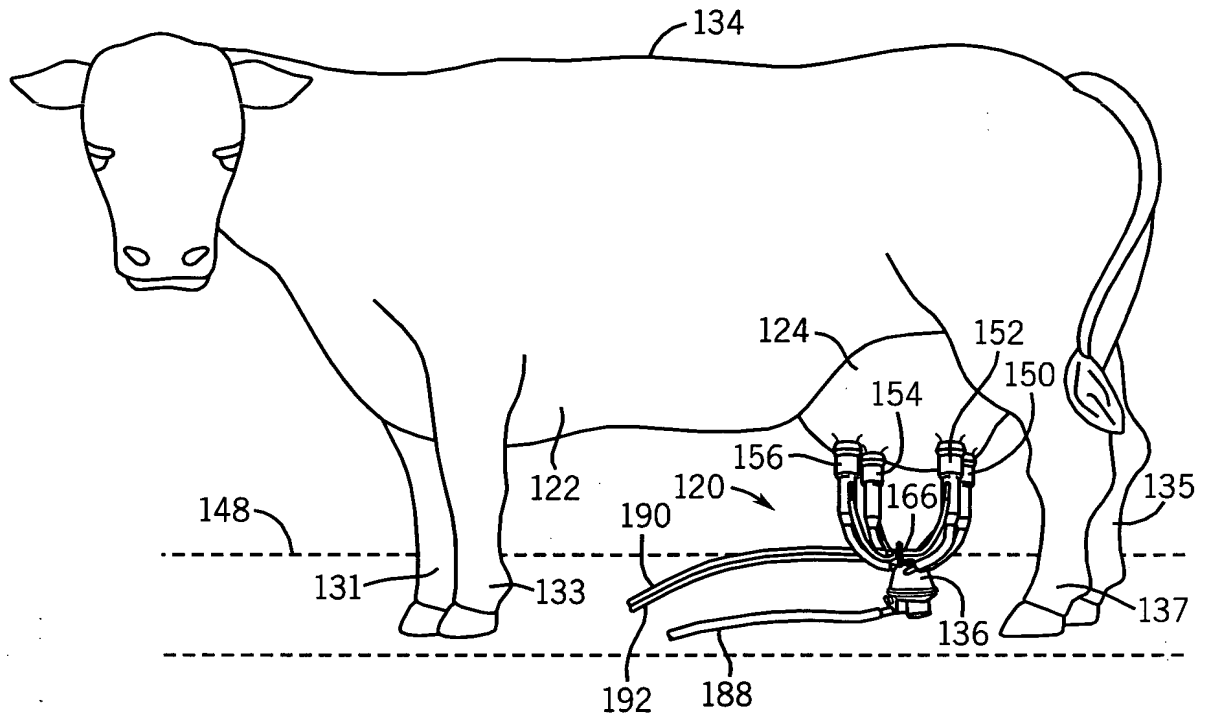


FIG. 7  
PRIOR ART

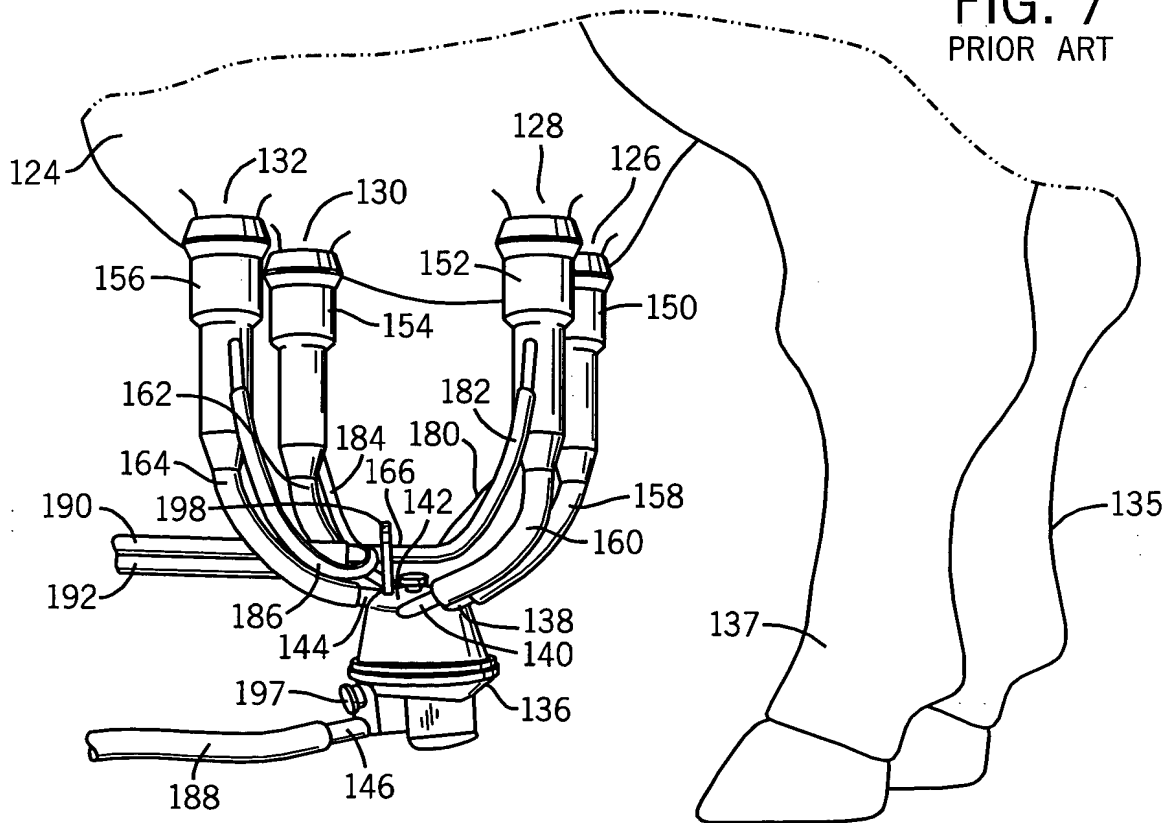


FIG. 8

FIG. 8 is a perspective view of a container assembly 202. The assembly includes a main body 206 with a base 208. A lid 210 is mounted on the body, featuring a handle 212 and a locking mechanism 214. A strap 234 is attached to the lid, with a buckle 236. A hose 204 is connected to the side of the body, with a nozzle 206. A dashed line 148 indicates a cross-section of the lid. Other components labeled include 197, 198, 199, 238, and 240.

FIG. 9

18

148

198

202

204

206

210

216

234

238

240

258

260

262

264

412

462

464

466

468

**FIG. 10**

FIG. 10 is a perspective view of a circular device. The device features a central square component with a circular opening in its center. Four radial arms extend from the central component towards the outer edge of the device. Each arm has a cylindrical end. The device is shown in a perspective view, with a dashed line indicating a cross-section. Various components are labeled with reference numerals: 148, 204, 238, 240, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286, 288, 462, 464, 466, 468, and 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236, 238, 240, 242, 244, 246, 248, 250, 252, 254, 256, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286, 288, 462, 464, 466, 468.

6 / 10

FIG. 11


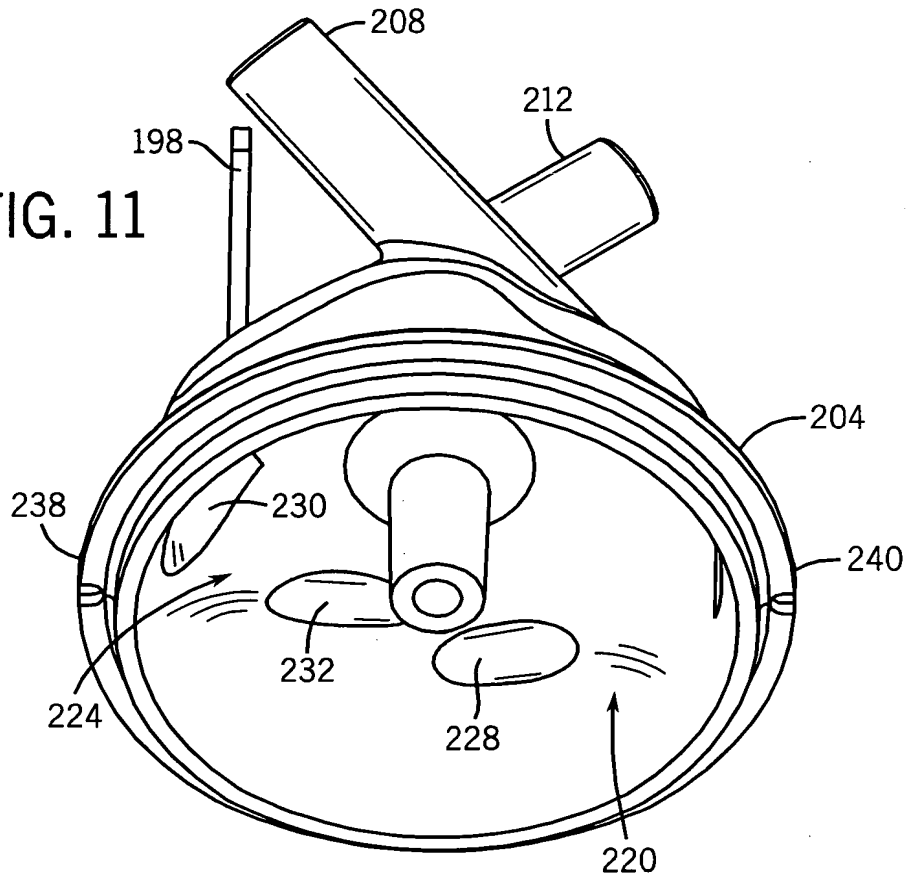


FIG. 12

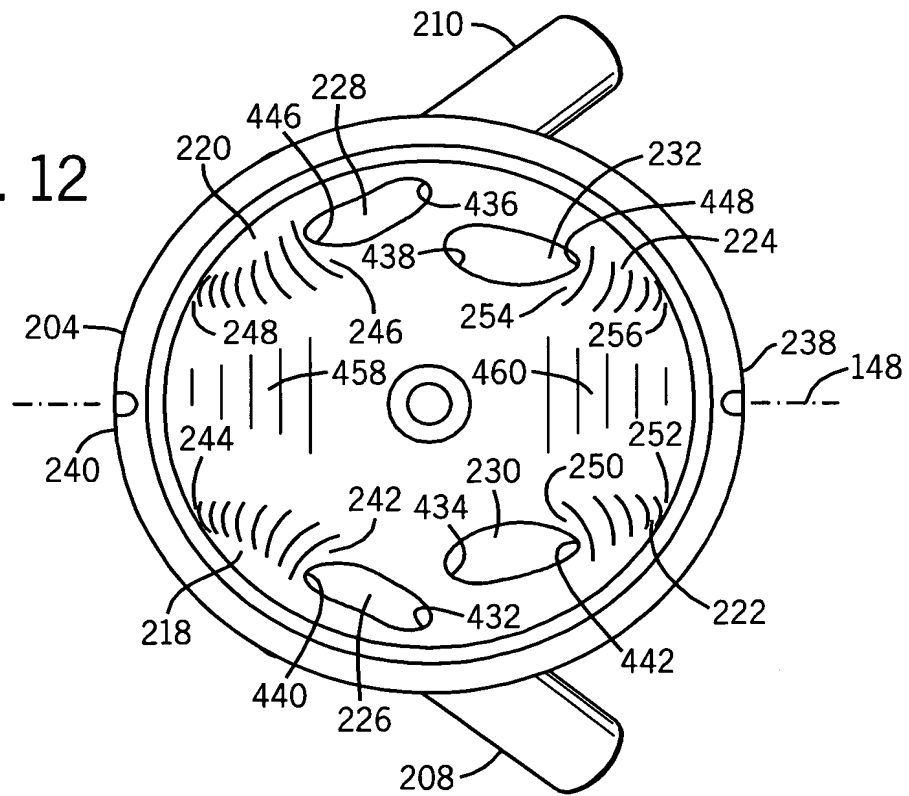

7 / 10

FIG. 13

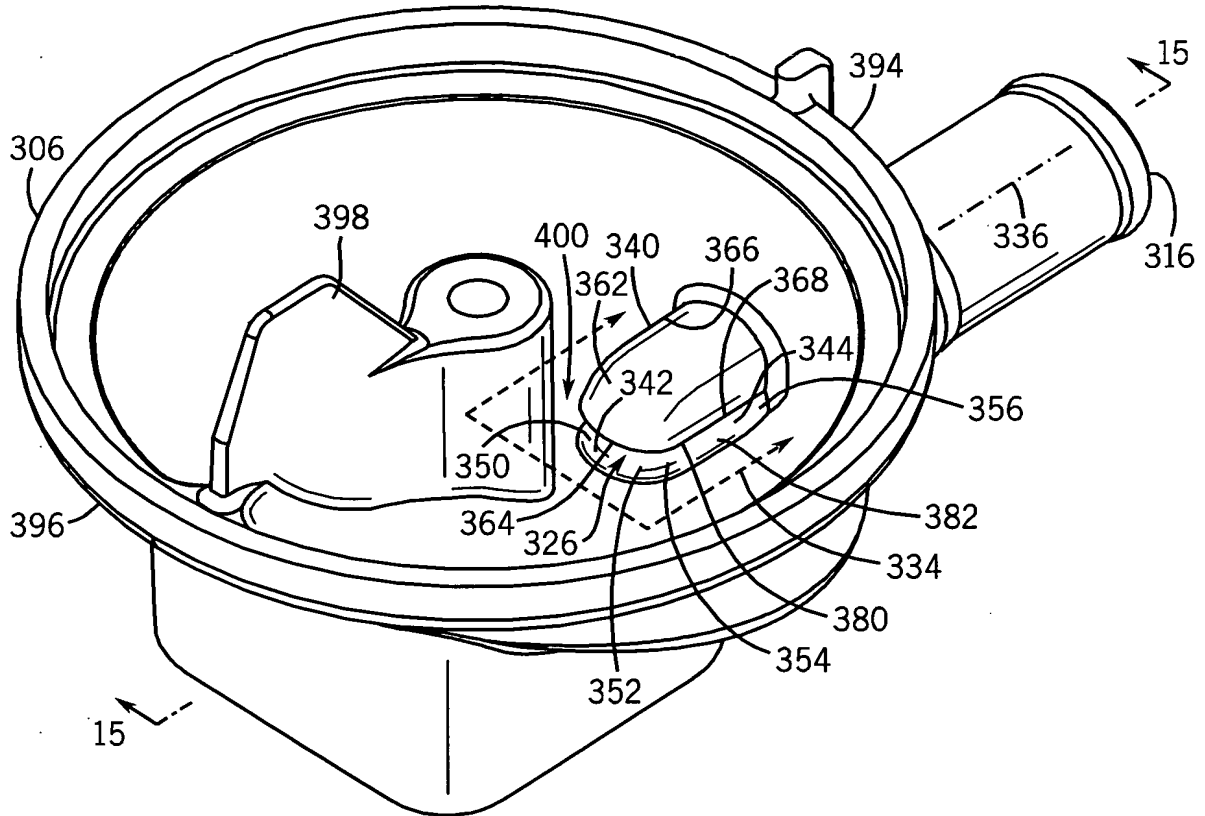
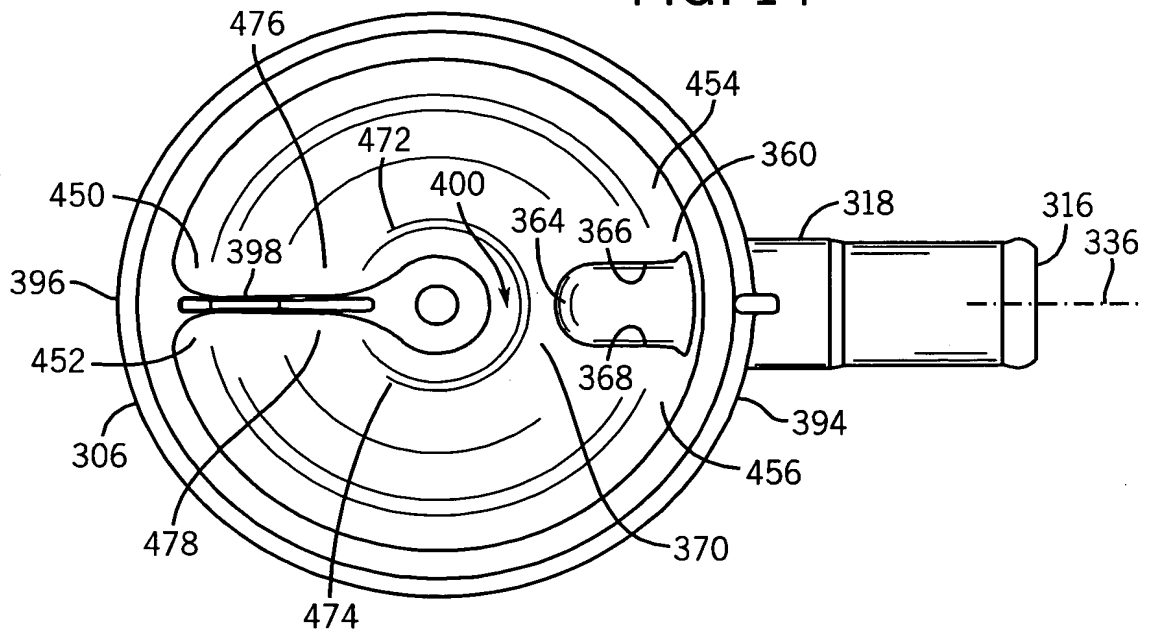


FIG. 14




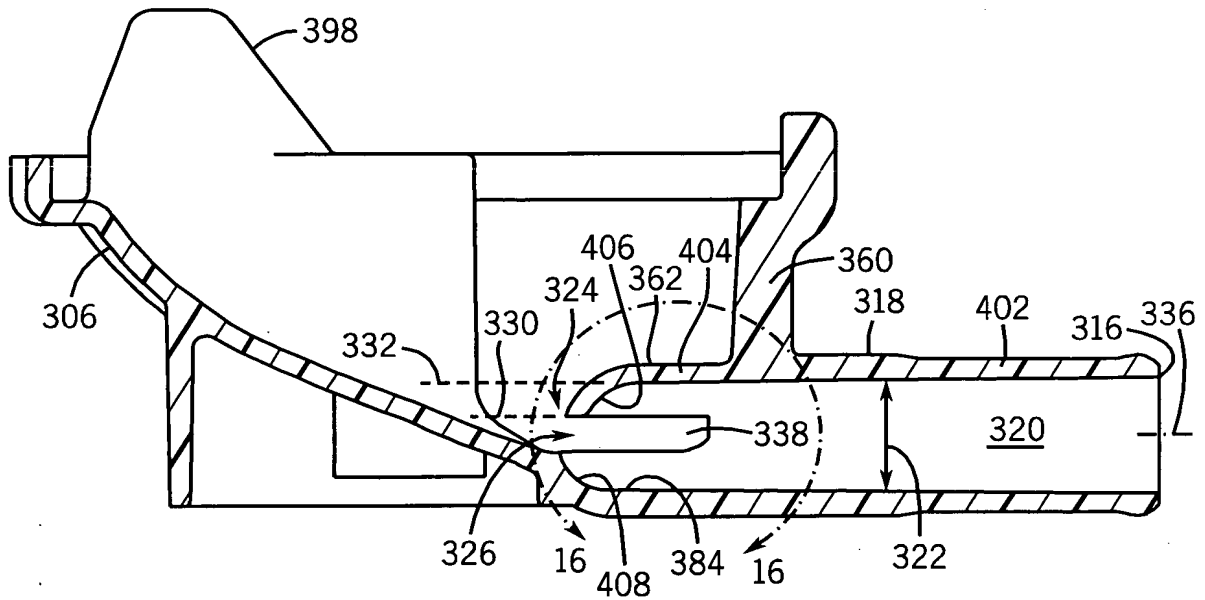


FIG. 15



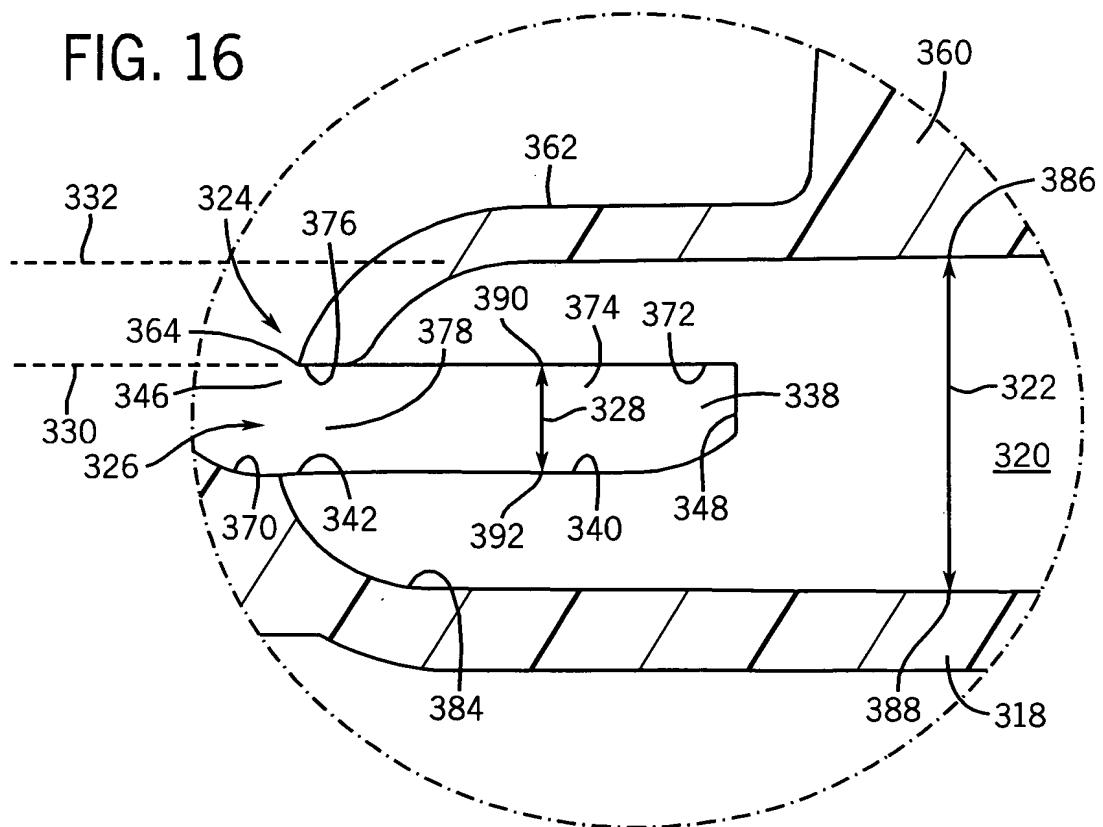

9 / 10

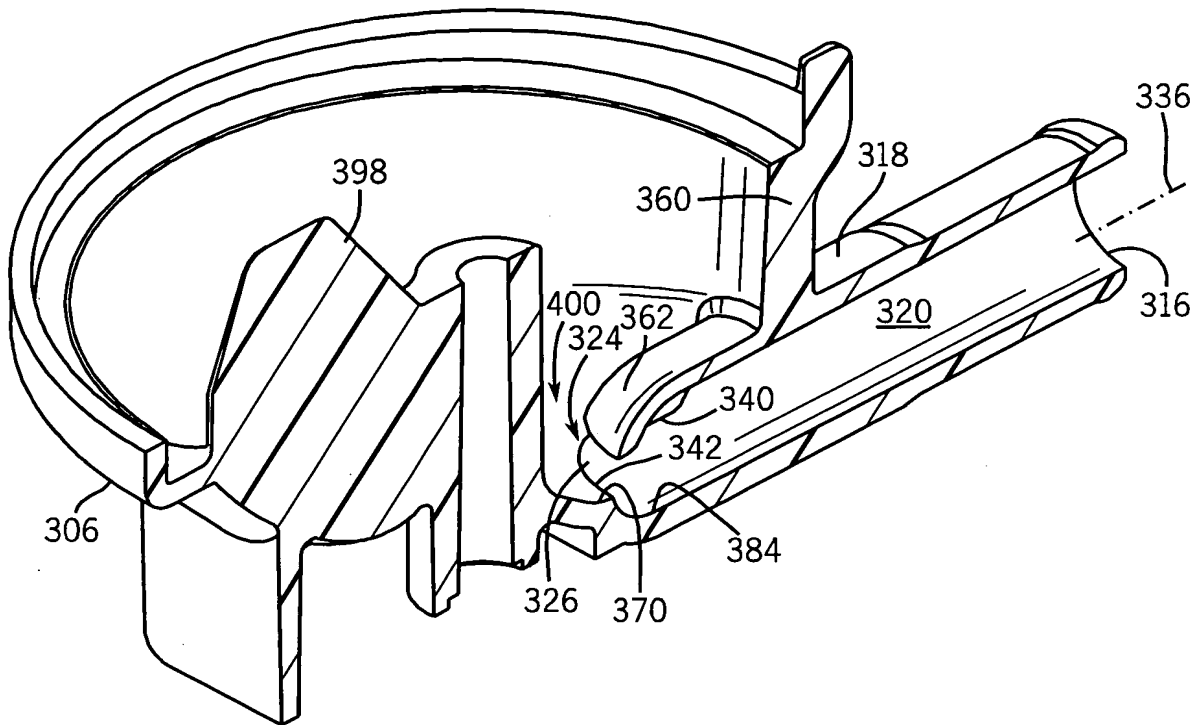


FIG. 17

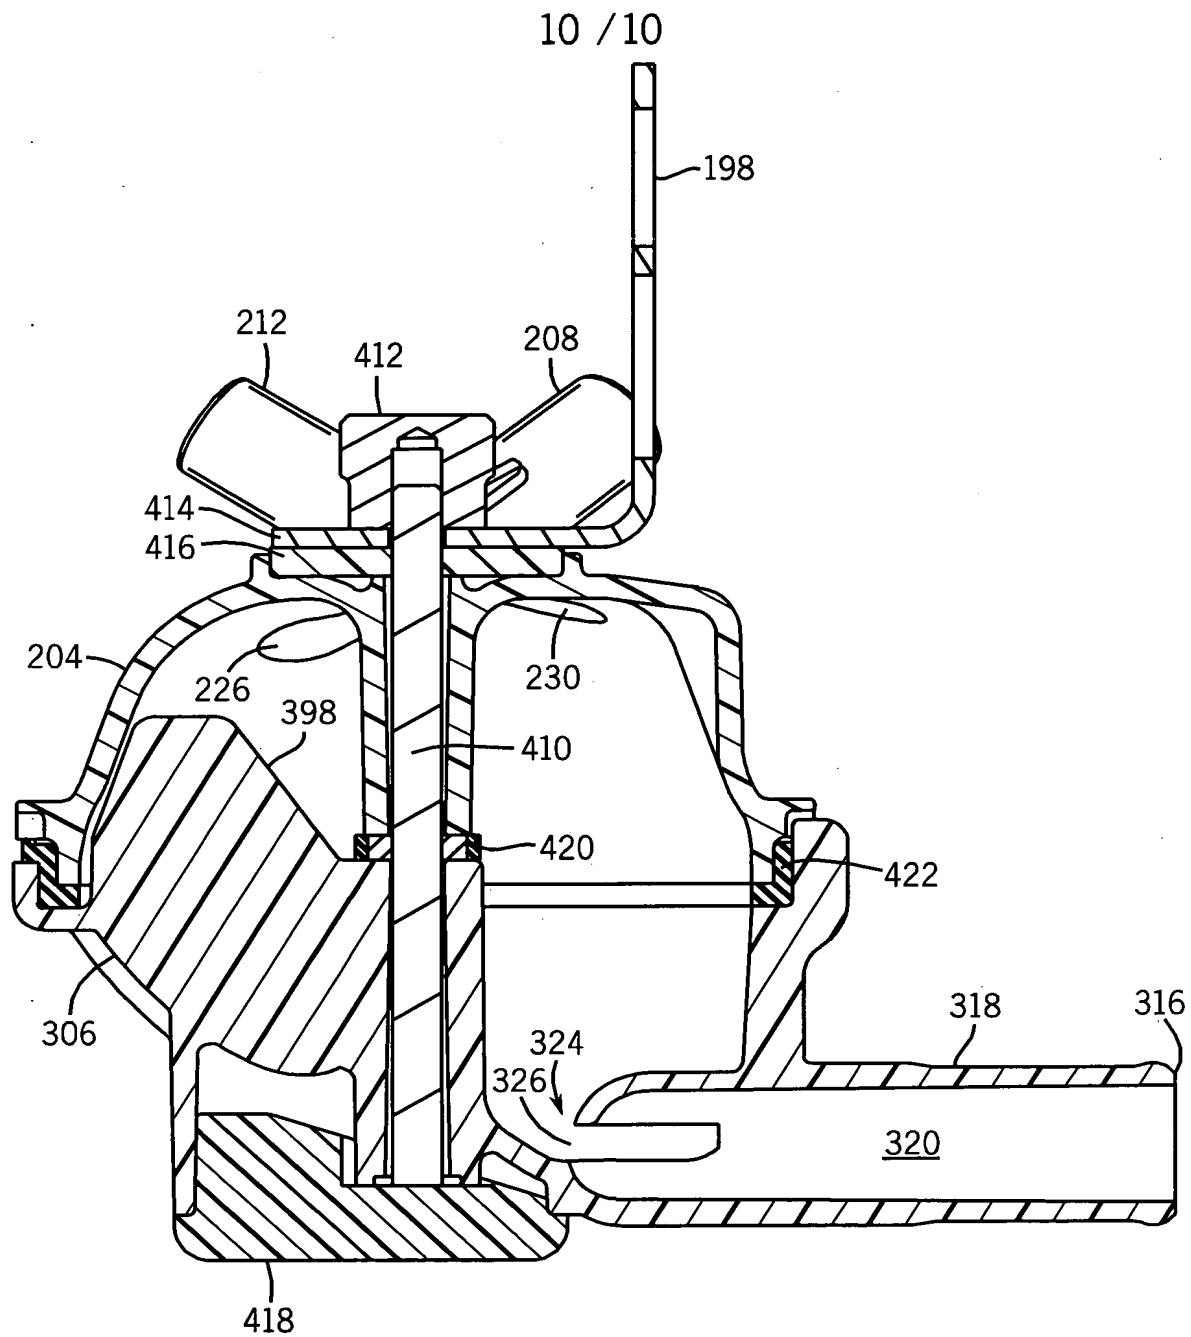


FIG. 18